



Mini Line Connector

Standard Plug Connector

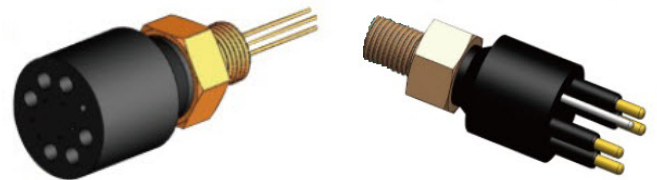



Standard Inline Connector

Square Type Plug Connector

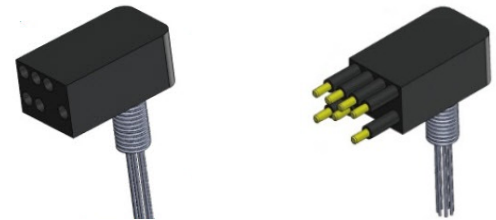

Square Type Inline Connector



Mini Plug Connector

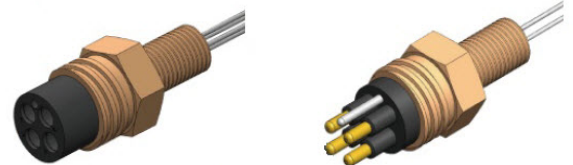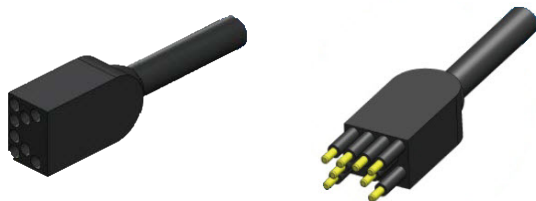


Mini Plug L Type Connector

Penetrator Inline

Branch Inline




➤ **Max Voltage: 600V** **Pin Material: Phosphor Bronze** **Depth: >600bar**



Type	Conductors	Max Current	In-Line cable
Mini Inline	2/4/6/8	2-4 contacts: 12A 6-8 contacts: 10A	AWG 18 16/30 Stranding Neoprene
Standard Inline	2/3/4/5/6/8/10/12/16	2-4 contacts: 12A 6-16 contacts: 10A	AWG 18 16/30 Stranding Neoprene
Square Type Inline	3/4/6/8	3-4 contacts: 12A 6-8 contacts: 10A	AWG 18 16/30 Stranding Neoprene

➤ **Max Voltage: 600V** **Pin Material: Phosphor Bronze** **Depth: >600bar**

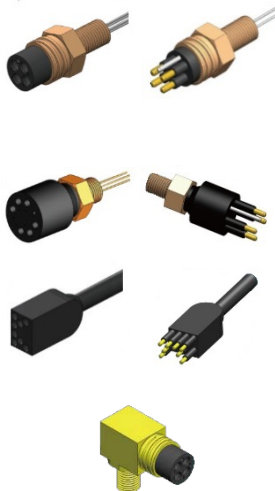


Type	Conductors	Max Current	Wire
Mini Plug	2/4/6/8	2-4 contacts: 12A 6-8 contacts: 7A	2-4 Contact: AWG 18 Teflon, (0.97mm ²), 19/30 stranding 6-8 Contact: AWG 18 Teflon, (0.6mm ²), 19/32 stranding
Standard	2/3/4/5/6/8/10/12/16	2-4 contacts: 12A 6-8 contacts: 10A	AWG 18 Teflon (0.97mm ²), 19/30 stranding
Square type Plug	3/4/6/8	3-4 contacts: 12A 6-8 contacts: 10A	AWG 18 Teflon (0.97mm ²), 19/30 stranding
Mini Plug L Type	2/4/6/8	2-4 contacts: 12A 6-8 contacts: 7A	2-4 Contact: AWG 18 Teflon, (0.97mm ²), 19/30 stranding 6-8 Contact: AWG 20 Teflon, (0.6mm ²), 19/32 stranding

➤ **Max Voltage: 600V** **Depth: >600bar**



Type	Conductors	O-Ring	Max Current	Inline Cable	Wire
Penetrator Inline	Max number of 8 pins	2-017	2-4 contacts: 12A 6-8 contacts: 10A	AWG 18 16/30 Standing Neoprene	AWG 18 Teflon, (0.97mm ²), 19/30 stranding



Type	Conductors	Max Current	Inline Cable
Branch Inline	2/4/6	2-4 contacts: 12A 6 contacts: 10A	AWG 18 16/30 Stranding Neoprene