



Smart for Greenlife!

## 套式比流器(D系列)


### 規格



CT-5D3



CT-50D3

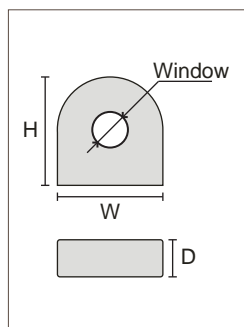

CT-200D3/CT-100D3

型號	CT-5D3	CT-50D3	CT-100D3	CT-200D3
量測電流	5A	50A	100A	200A
匝數比	3000 : 1			
電壓範圍	380VAC以下	600VAC以下		
耐壓絕緣	3KV			
工作頻率	50Hz ~ 400Hz			
工作溫度	-25°C ~ 85°C			
Window (Φ)	7mm	12.5mm	26mm	
尺寸 (W x H x D)	23 x 25 x 12.5mm	37 x 38 x 13mm	54 x 54 x 18mm	

## 扣式比流器(S/SB系列)


### 規格



CT-S 系列



CT-SB 系列

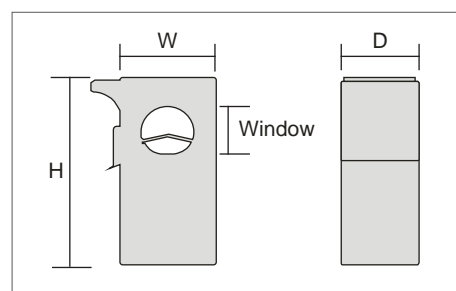


型號	CT-5S	CT-50S/SB	CT-100S/SB	CT-200S/SB	CT-400S	CT-600S
量測電流	0.01-5A	0.1-50A	0.1-100A	0.1-200A	0.1-400A	0.1-600A
匝數比	3000 : 1				6000 : 1	9000 : 1
電壓範圍	600VAC以下					
耐壓絕緣	2.2KV					
工作頻率	10Hz ~ 50KHz			50Hz ~ 10KHz		
工作溫度	-20°C ~ 50°C					
Window (Φ)	10mm	10mm	16mm	24mm	35mm	35mm
尺寸 (W x H x D)	25 x 41 x 33mm	26 x 48 x 23mm (S) 23 x 39 x 26mm (SB)	31 x 54 x 30mm (S) 32 x 56 x 31mm (SB)	36 x 76 x 45mm(S) 51 x 67 x 34mm(SB)	60 x 80 x 40mm	60 x 80 x 40mm

## 勾式比流器(C系列)

### 規格



CT-200C

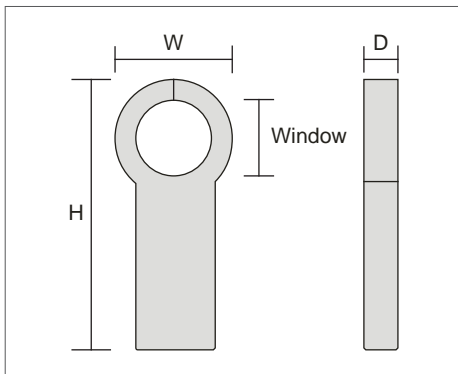CT-400C  
CT-600C

型號	CT-200C	CT-400C	CT-600C
量測電流	1-200A	1-400A	1-600A
匝數比	2000 : 1	3600 : 1	
電壓範圍	600VAC以下		
耐壓絕緣	2.2KV		
工作頻率	10Hz ~ 500Hz		
工作溫度	0°C ~ 60°C		
Window (Φ)	33mm	40mm	40mm
尺寸 (W x H x D)	54 x 114 x 20mm	64 x 175 x 23mm	64 x 175 x 23mm

### 訂貨號

#### 套式比流器(D系列)

訂貨號	說明
CT-5D3	5A
CT-50D3	50A
CT-100D3	100A
CT-200D3	200A

#### 勾式比流器(C系列)

訂貨號	說明
CT-200C	200A
CT-400C	400A
CT-600C	600A

#### 扣式比流器(S/SB系列)

訂貨號	說明
CT-5S	5A
CT-50S	50A
CT-100S	100A
CT-200S	200A
CT-400S	400A
CT-600S	600A
訂貨號	說明
CT-50SB	50A
CT-100SB	100A
CT-200SB	200A