

# MIMG-D1

D1 / Watch dog / 42 x 42mm

## Video IP module D1 42x42

1 channel video output,1 channel audio input

Multiple streaming at the same time

Support motion detection

H.264/ MPEG4/ MJPEG multiple stream 30fps at D1


Product Overview

Support RS485 communication

Support watch dog timer function

Support RTC real time clock function

Remote accessibility

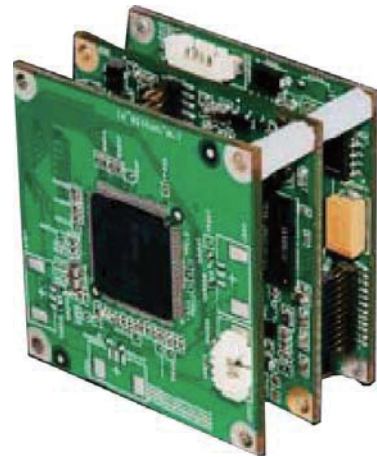

<b>Description</b>	Network Video Server IP module
<b>PCB dimension</b>	42x42mm
<b>Processor</b>	DSP Base (DaVinci TM320DM365)
<b>Video Compression</b>	H.264 HP/MP/BP, MPEG-4 SP, M-JPEG
<b>Resolution</b>	D1(720x480):30fps VGA (640 x 480): 30 fps QVGA (320 x 240): 30 fps QCIF (176 x 144): 30 fps
<b>Multiple Streaming</b>	Yes
<b>SD/SDHC interface</b>	Yes
<b>Power-over-Ethernet (IEEE 802.3af)</b>	option
<b>Audio Support</b>	Two-way
<b>Alarm Input/output</b>	1x D/I, 1x D/O
<b>Digital zoom</b>	10x
<b>ONVIF</b>	Yes
<b>Protocol</b>	TCP/IP,IPV6,IPV4, UDP,ICMP ,DHCP ,NTP ,DNS ,DDNS ,SMTP ,FTP ,HTTP ,HTTPs ,Samba,PPPoE ,UPnP, Bonjour, RTP, RTSP, RTCP
<b>QoS</b>	Yes
<b>Multi-level user access</b>	Yes
<b>IP filtering</b>	Yes
<b>3GPP support</b>	Yes
<b>Time Management</b>	Manual Time Setting Time Server and NTP support Real Time Clock
<b>Event Management</b>	Events Triggered by Motion detection or GPIO Image or Video Upload/Send over email ,FTP, samba Recording Video file to SD Card by schedule
<b>Operation temperature</b>	0~50°C
<b>System Management</b>	64-ch Management Software(ExpressView)
<b>Package</b>	Accessories: Power Supply (option) Compound cable(option) Packaging(white box) CD

所有產品規格皆以現行產品為準，如有更改恕不另行通知